

GV POS-DVR Surveillance System



Key Features


- Ethernet version supports up to 16 POS or Cash Registers. Each Data Capture supports 1 POS or Cash Register.
- POS transaction text overlays on monitoring video and recorded video files with optional voice recording.
- Searches for a POS event video by keyword in the receipt, transaction event or time.
- Microsoft Access formatted POS transaction database for easy event analysis and integration.
- Adjustable POS text font, text color, background color and text alignment on screen and video files.
- Abnormal transaction alerts via e-mail, phone, SMS or by alarm output.
- Cash drawer opening event triggers event log for video retrieving.

V8.1 New Features


- Highlight special keywords on screen, syslog, video with color.
- Use special keywords to trigger digital I/O.
- POS live view using WebCam.



GV POS-DVR Surveillance System Solution

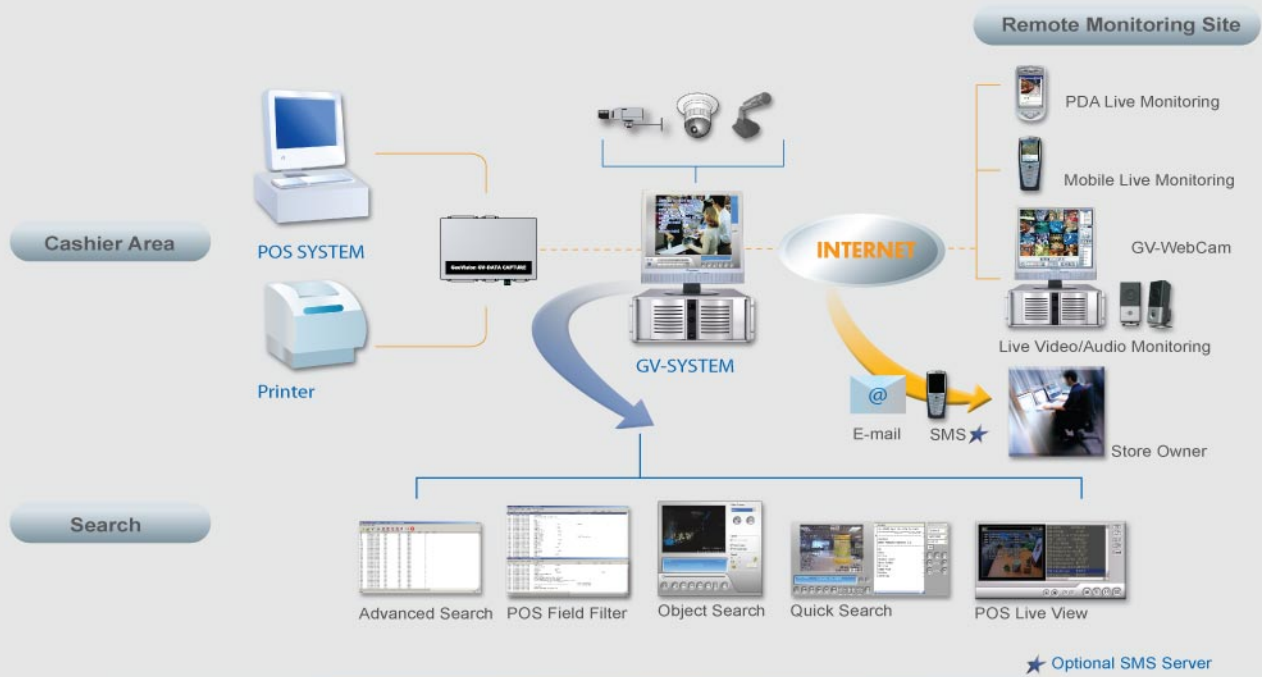

Connection Diagram

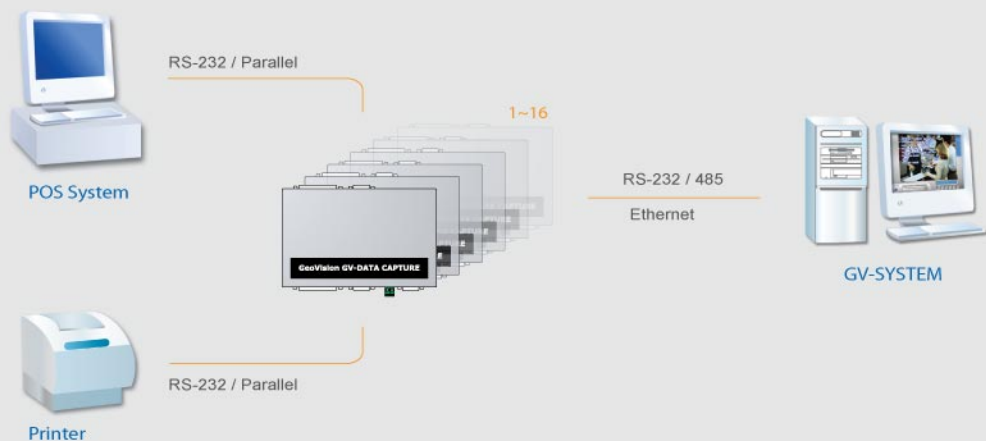

Specifications

	Connector	Function
Input	DB9 Female	RS-232 from POS
	DB25 Male / Parallel Port	RS-232 from POS / Parallel Port from POS
Output	DB9 Male	RS-232 to Printer
	DB25Female / Parallel Port	RS-232 to Printer / Parallel Port from POS
	DB9 Female	RS-232 to DVR
	RJ-45	RJ-45 to DVR
	RS-485+	Connect to GV-NET / GV-Hub/GV-Com RS-485+
	RS-485-	Connect to GV-NET / GV-Hub/GV-Com RS-485-
DC IN	Power Adapter DC5V, 2A Inner Positive	
Operation Temperature	0 ~ 50°C	
Humidity	5%~95% (non-condensing)	
Dimensions	161 (W) x 34 (H) x 123 (D) mm	



9F., No. 246, Sec. 1, Neihu Rd., Neihu District, Taipei, Taiwan 114, R.O.C.

Tel: +886-2-8797-8377

Fax: +886-2-8797-8335

Email: sales@geovision.com.tw

http://www.geovision.com.tw

★ All specifications may change without prior notification.

© 2007 GeoVision Inc. All Rights Reserved. All GeoVision Products are manufactured in Taiwan.