
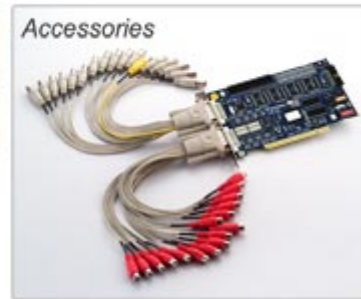


# GV-1240 Combo Card

DVI

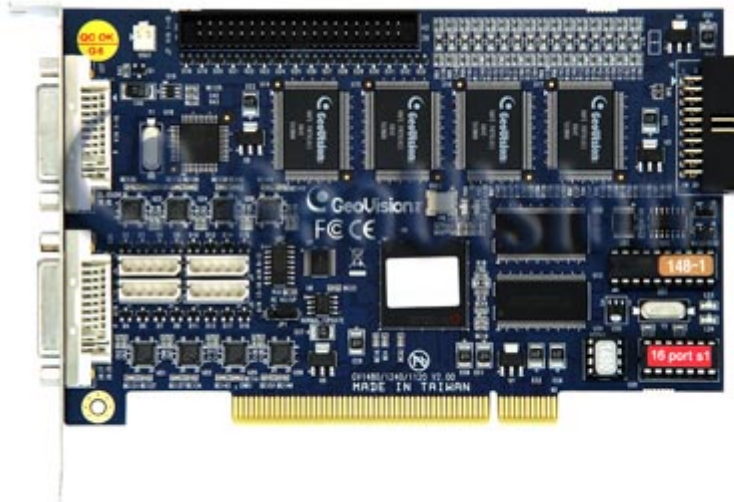

CE FC

D-Type



PCI

PCI Express



CE FC

## Specifications

Input Type	DVI : DVI x 2 (one for 16 video, one for 16 audio) D-Type: DB15 x 2 (for video) ; DB9 x 2 (extension card for audio)
Video Input(s)	8, 16 Cams
Audio Input(s)	8, 16 Channels
TV Output	RCA Connector x 1
Total Recording Rate At 320 X 240 Resolution	240 fps (NTSC), 200 fps (PAL)
Display Rate	480 fps (NTSC), 400 fps (PAL)
Video Resolution - NTSC/PAL	Full D1, Half D1, CIF
Compression Format	Geo MPEG4, Geo MPEG4 (ASP), Geo H264, Geo H264 V2
GV-NET Card Support	Yes
GV-NET/IO Card Support	Yes
Dimensions	DVI PCI : 165 x 95 (mm) / 6.50 x 3.74 (in) D-Type PCI : 170 x 95 (mm) / 6.69 x 3.74 (in) D-Type PCI Express: 212 x 99 (mm) / 8.35 x 3.90 (in)
Installation Guide	DVI PCI D-Type PCI D-Type PCI Express Installing two cards

**Note: GV-1240 is currently not compatible with VIA series and ATI series chipset motherboards, and 64-bit Windows operating system.**

Minimum System Requirements For One Card	
OS Supported	Windows 2000 / Windows XP / Windows Server 2003 / Windows Vista (Not support 64-bit version of Windows)
CPU	Pentium 4-3.0 GHz Dual Core
RAM	Windows 2000 / XP: 2 x 512 MB Dual Channels Windows Vista / Server 2003: 2 x 1 GB Dual Channels
HDD	120 GB
VGA	ATI Radeon X600 NVIDIA 6200
DirectX	9.0c
Minimum System Requirements For Two Cards	
OS Supported	Windows 2000 / Windows XP / Windows Server 2003 / Windows Vista (Not support 64-bit version of Windows)
CPU	Core 2 Duo, 2.53 GHz
RAM	2 x 1GB Dual Channels
HDD	250 GB
VGA	ATI Radeon X1300 PCI-E NVIDIA GeForce 7300 PCI-E
DirectX	9.0c