


GV-600 Video Capture Card



GV-600 BNC

GV-600 D-Type

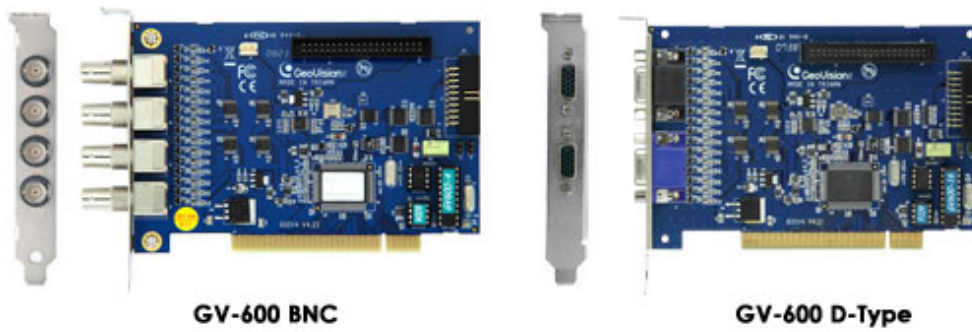

Specifications

Input Type	GV-600 BNC: BNC X 4 GV-600 D-Type: DB15 X 2
Video Input(s)	1, 2, 4, 6, 8, 10, 12, 14, 16 Cams
Audio Input(s)	1 Channel
Total Recording Rate At 320 X 240 Resolution / MPEG (ASP)	30 fps (NTSC), 25 fps (PAL)
Display Rate	30 fps (NTSC), 25 fps (PAL)
Video Resolution - NTSC/PAL	Full D1, Half D1, CIF
Compression Format	Geo MPEG4, Geo MPEG4 (ASP), Geo H264, Geo H264 V2
GV-A16 Support	Yes
GV-NET Card Support	Yes
GV-NET/IO Card Support	Yes
Dimensions (W x H)	GV-600 BNC: 144 x 89 (mm) / 5.67 x 3.50 (in) GV-600 D-Type: 144 x 89 (mm) / 5.67 x 3.50 (in)
Installation Guide	Single Card & Two Cards

Note: GV-600 is currently not compatible with VIA series and ATI series chipset motherboards.

Minimum System Requirements For One Card

OS Supported	32-bit	Windows XP / Windows Vista / Windows 7 / Windows Server 2008
	64-bit	Windows 7 / Windows Server 2008
CPU	Pentium 4, 2.0 GHz	
RAM	Windows XP: 2 x 512 MB Dual Channels Windows Vista / 7 / Server 2008 : 2 x 1 GB Dual Channels	
HDD	80 GB	
VGA	ATI Radeon X600 NVIDIA 6200	
DirectX	9.0c	

Minimum System Requirements For Two Cards

OS Supported	32-bit	Windows XP / Windows Vista / Windows 7 / Windows Server 2008
	64-bit	Windows 7 / Windows Server 2008
CPU	Pentium 4, 2.6 GHz with Hyper-threading	
RAM	2 x 1 GB Dual Channels	
HDD	160 GB	
VGA	ATI Radeon X600 NVIDIA 6200	
DirectX	9.0c	

Accessories



4 ports Audio Extension Card



1-8 Cams Video/Audio Cable



9-16 Cams Video Cable