



# STARLIGHT

## Target Series



Excellent  
price-to-performance ratio


- Sony STARVIS CMOS image sensor-Super Low Lux
- Wide Dynamic Range Pro
- Precise Iris Control
- IK 10/IP 67 ( Partial Support )
- 3-Axis mechanism

# Product Features

## Sony Starvis CMOS image sensor-Super Low Lux

Target Series models offer superior low light capability with a highly sensitive backside-illuminated Sony Starvis CMOS sensor to capture usable color images even at night or any low light environments, every detail could be recorded and reserved. Sony STARVIS technology improves on Exmor R's low light sensitivity. By extending the sensor sensitivity to include the near-infrared range STARVIS sensors offer better imaging performance and are specifically designed for lower light conditions than

standard back-illuminated CMOS sensors. It was first designed for surveillance and security cameras for clear imaging at night but is now available for other applications that demand imaging in extreme low light environments. There is a requirement for surveillance cameras to monitor with clear images in a variety of environments and Geovision Target Series can meet this requirement by providing high-sensitivity performance suitable for night filming.

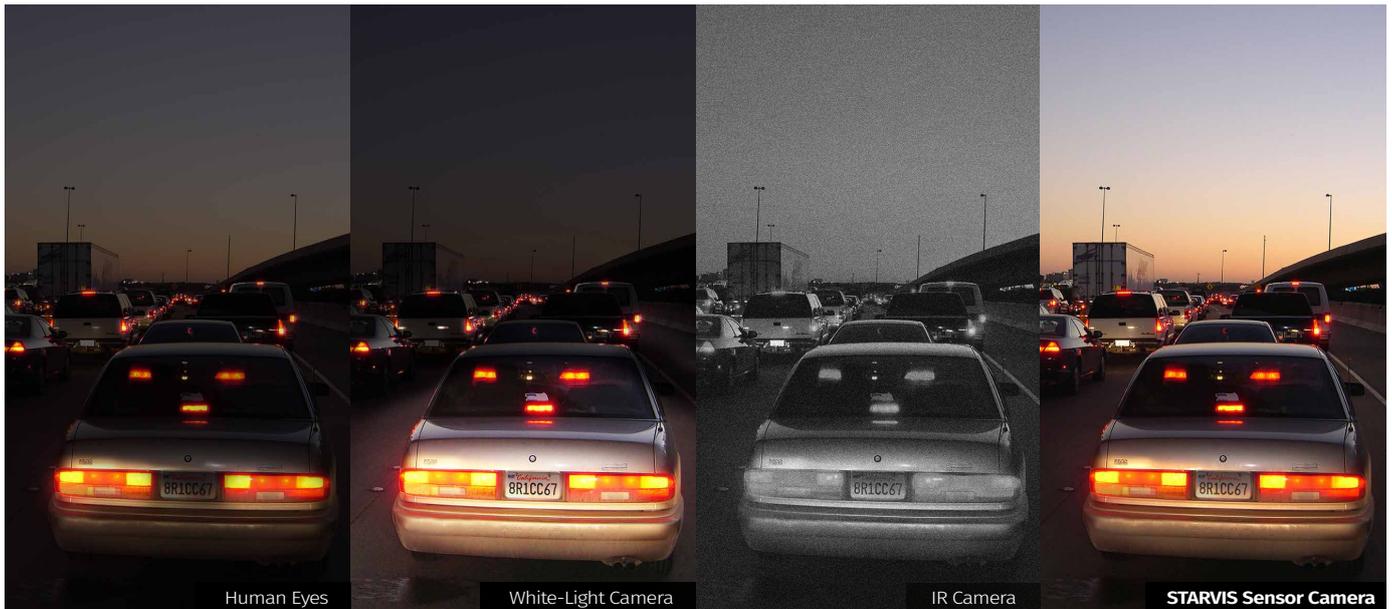

## Wide Dynamic Range Pro

Capture a reliably identify persons, vehicles, objects and activities in scenarios where there is a wide range of lighting conditions, especially in back light area.




## 3-Axis mechanism

With 3-Axis adjustment, the camera should display horizontal image regardless being mounted on ceiling, wall or pole.



## Precise Iris Control


Deliver crisp, high-resolution image, good depth of field and avoid diffraction in bright scenes.

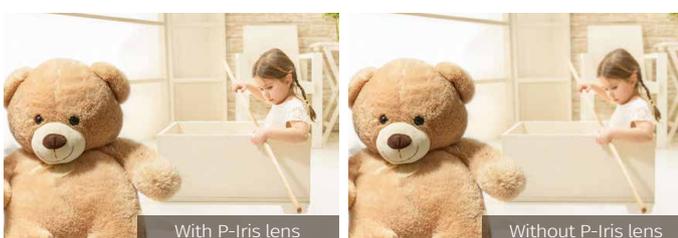

By turning the angle you can change view easily without hassle!


There is no way to angle the view right.

## Versatile Mounting

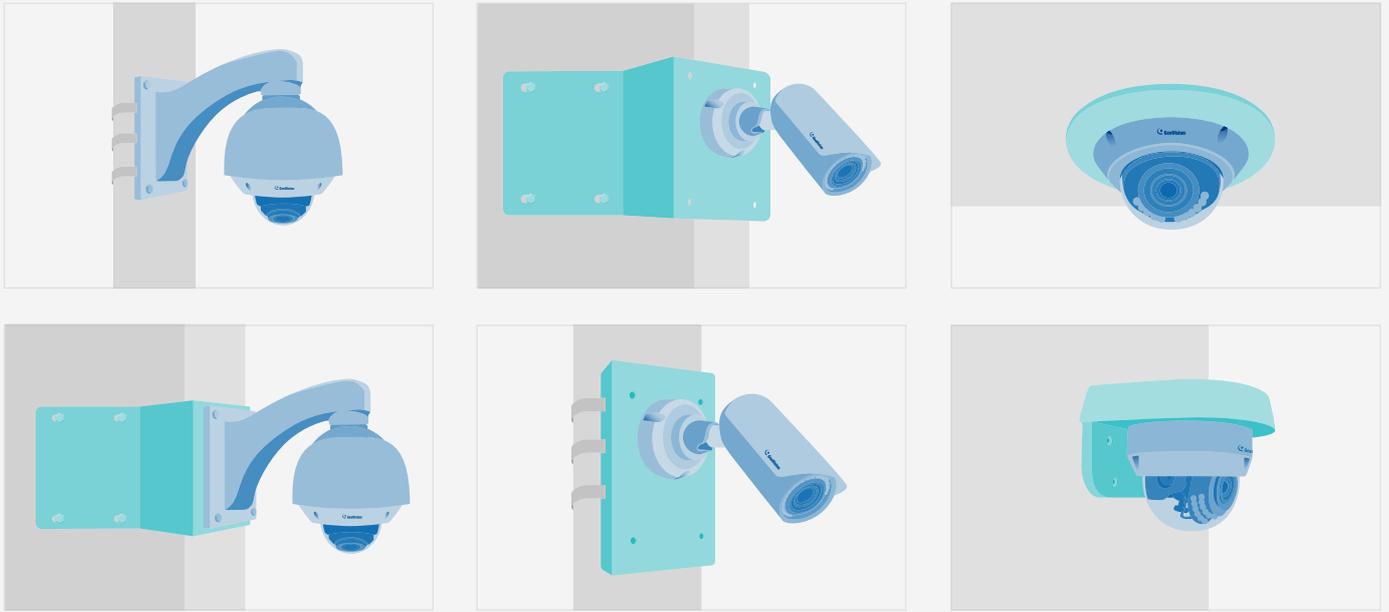

Versatile mounting solution for maximum installation flexibility and versatility.

## How it works

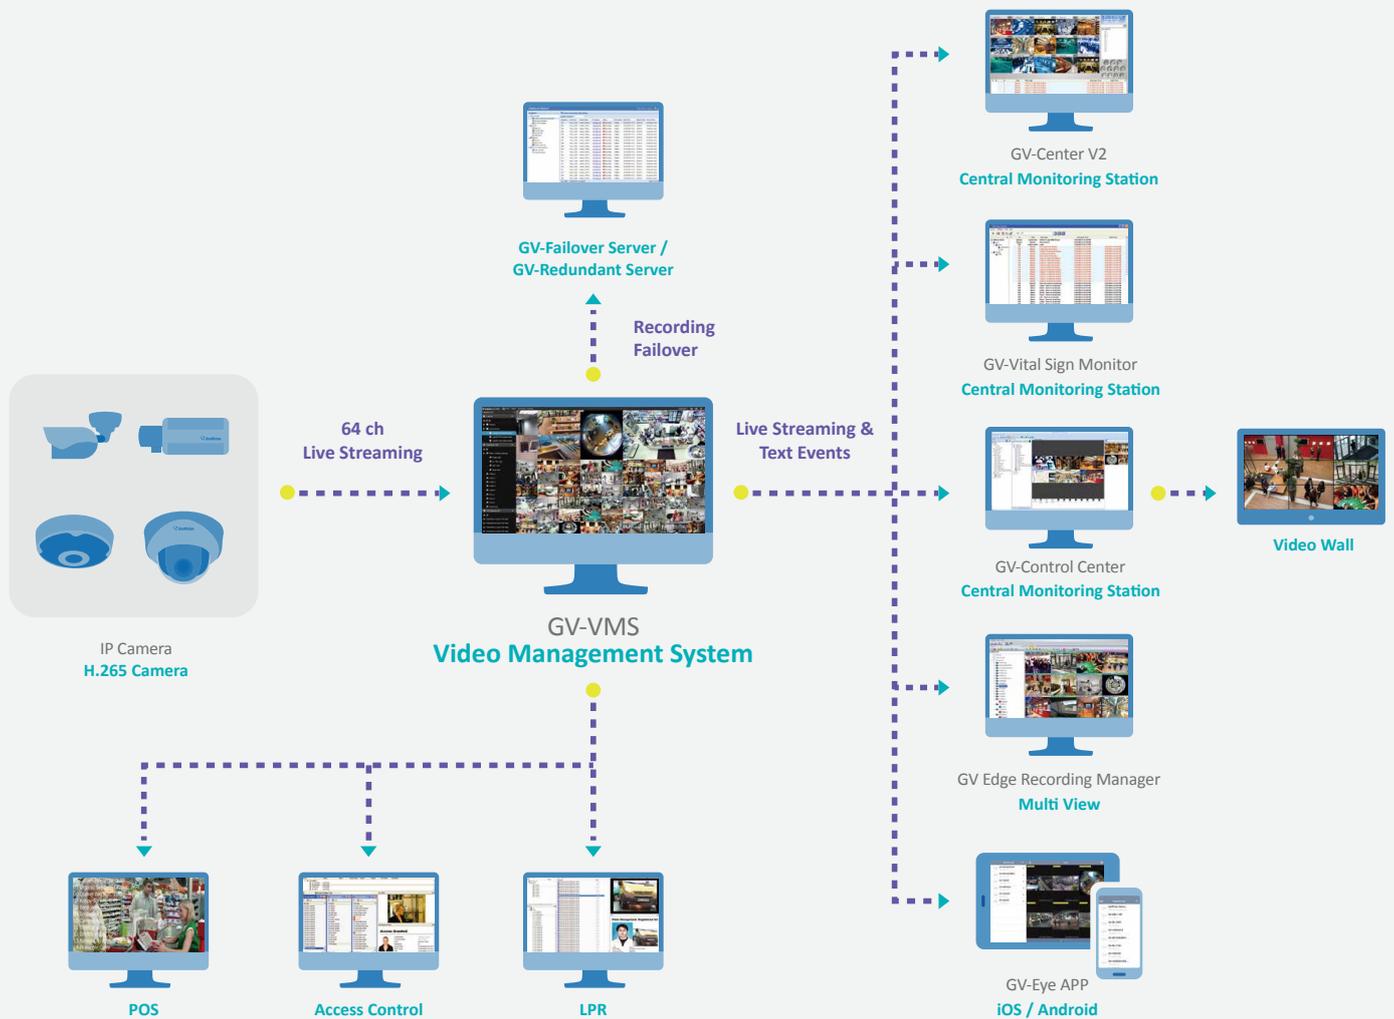

# Target Super Low Lux Cameras

## EBL2111

2MP H.264 4.3X Zoom  
Super Low Lux WDR IR  
Bullet IP Camera



- Up to 30 fps at 1920 x 1080
- P-iris for auto iris adjustment
- Super Low Lux & WDR
- Intelligent IR
- IR distance up to 75 m (246.06 ft)
- Ingress protection(IP67) & Vandal resistance (IK10 for metal casing)

## EBL2101

2MP H.264 Super Low Lux  
WDR IR Bullet IP Camera



- Up to 30 fps at 1920 x 1080
- P-iris for auto iris adjustment
- Super Low Lux & WDR
- Intelligent IR
- IR distance up to 75 m (246.06 ft)
- Ingress protection(IP67) & Vandal resistance (IK10 for metal casing)

## EBL3101

3MP H.264 Super Low Lux  
WDR Pro IR Bullet IP Camera



- Up to 30 fps at 2048 x 1536
- P-iris for auto iris adjustment
- Super Low Lux & WDR Pro
- Intelligent IR
- IR distance up to 60 m (196.85 ft)
- Ingress protection(IP67) & Vandal resistance (IK10 for metal casing)

## EVD2100

2MP H.264 Super Low Lux  
WDR IR Vandal Proof IP Dome



- Up to 30 fps at 1920 x 1080
- P-iris for auto iris adjustment
- Super Low Lux & WDR
- Intelligent IR
- IR distance up to 50 m (164.04 ft)
- Ingress protection(IP67) & Vandal resistance (IK10)
- 3-Axis mechanism (pan / tilt / rotate)

## EVD3100

3MP H.264 Super Low Lux  
WDR Pro IR Vandal Proof IP Dome



- Up to 30 fps at 2048 x 1536
- P-iris for auto iris adjustment
- Super Low Lux & WDR Pro
- Intelligent IR
- IR distance up to 50 m (164.04 ft)
- Ingress protection(IP67) & Vandal resistance (IK10)
- 3-Axis mechanism (pan / tilt / rotate)

## EFD2101

2MP H.264 Super Low Lux  
WDR IR Fixed IP Dome



- Up to 30 fps at 1920 x 1080
- P-iris for auto iris adjustment
- Super Low Lux & WDR
- Intelligent IR
- IR distance up to 50 m (164.04 ft)
- 3-Axis mechanism (pan / tilt / rotate)

## EFD3101

3MP H.264 Super Low Lux  
WDR Pro IR Fixed IP Dome



- Up to 30 fps at 2048 x 1536
- P-iris for auto iris adjustment
- Super Low Lux & WDR Pro
- Intelligent IR
- IR distance up to 50 m (164.04 ft)
- 3-Axis mechanism (pan / tilt / rotate)