


GV-H.264 Video Server (GV-VS12)



- H.264, MPEG4, MJPEG
- 2-Channel full D1 real-time video / audio
- Compact size
- PoE / 12V DC
- Tampering Alarm
- USB storage recording
- GPS support
- UMTS/ 3G / 3.5G support
- Over 40 branded speed dome protocols available
- Full intergration with GeoVision series solutions

GV-VS12 is a powerful H.264 Video Server with compact size and supports multiple applications. It supports PoE, and 2-channel full D1 real-time video and audio encoding, fully integrated with GV-NVR to form the most powerful IP surveillance solution. It also supports over 40 branded speed dome protocols to fulfill various project demands. It can record video to a local USB storage, forming the smallest video recorder. With GPS and UMTS/3G/3.5G support, it provides GIS solution integrated with GV-GIS. It can also active Tampering Alarm alerts when a tampering event happens to prevent crime events.

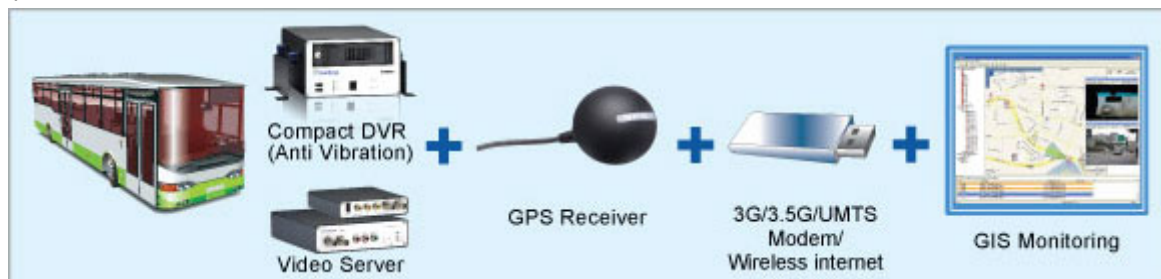

SPECIFICATIONS

Video		
Video Standard	NTSC, PAL	
Video Input	2 channels	
Compression	H.264, MPEG4, MJPEG	
Frame Rate (at Full D1 resolution)	NTSC	30 fps per channel; 60 fps in total
	PAL	25 fps per channel; 50 fps in total
Resolution	Full D1, Half D1, CIF, QCIF	
Video Streaming	Configurable frame rate and bandwidth, Constant and variable bitrate,	
Video Adjustment	Brightness, Contrast, Hue, Saturation, Image Quality, Image Size, Bitrate, GOP (Group of Picture) size	
Audio		
Audio Input	2 channels	
Compression	G.711	
Management		
Event Management	Trigger	Schedule, Sensor Input, Motion Detection
	Action	Store Video (AVI format), Email with captured images, Captured images uploaded over FTP, Monitoring by Center V2, VSM and GV-GIS, Relay outputs to control external devices
Firmware Upgrade	Remote upgrade by HTTP, Firmware upgrade utility included in the Software DVD	
Storage	Mass storage through USB (optional)	
Client PC Requirements	Microsoft IE 6.x or above running on Windows 2000/XP/2003/Vista	
Security	IP address filtering	

Network		
Interface	10/100 Base-T Ethernet, 802.11b/g Wireless LAN (optional)	
Protocol	HTTP, TCP, UDP, SMTP, FTP, DHCP, NTP, UPnP, DynDNS	
Connector		
Video Input	BNC 2 ports	
Audio Input	RCA 2 ports	
Audio Output	RCA 1 port	
Terminal Block	RS-232 interface for GPS	
RJ-45 Connector	2 digital inputs, 2 relay outputs, RS±485	
Ethernet	RJ-45, 10/100 Mbps	
USB 2.0	2 ports	
Power	Power Jack	1 DC-In power jack
	Input	100-240V, 1.2A, 50-60 mHz
	Output	12V, 3A, (36W Max.)
Power over Ethernet		
PoE Standard	IEEE 802.3af Power over Ethernet / PSE	
PoE Power Supply Type	End-Span	
PoE Power Output	Per Port 48V DC, 350mA. Max. 15.4 watts	
Alarm		
Sensor Input	2 inputs	
Alarm Output	2 outputs	
Environment		
Operation Temp.	-20 ~ 55 °C / -4 ~ 131 °F	
Humidity	0 ~ 85% RH (non-condensing)	
Physical		
Dimensions (L x W x H)	123 x 106 x 25 mm / 4.84 x 4.17 x 0.98 in	
Weight	0.345 kg / 0.76 lb (Net)	

Note: * Product design and specifications are subject to change without notice.

- * The maximum number of connections to the GV-Video Server is 20. When one GV-System connects to one GV-Video Sever, it takes up to 4 connections. When users connect to one GV-Video Server through browser, it takes up to 2 connections. When users operate the Camera/Audio Control on Center V2, it takes 1 connection.

Options

Optional devices can expand your GV-Video Server's capabilities and versatility. Contact your dealer for more information.

GV-GPS Receiver	GV-GPS Receiver is a Global Position System receiver, allowing you to perform vehicle tracking and location verification functions. It is available in two types of interfaces: UART and RS-232.
GV-Relay V2	Working with this module, GV-Video Server can drive the loads of relay outputs over 5 volts.
GV-Storage System	The iSCSI storage system allows you to record files over the Internet.